

Eco Light


16-34m



The packaging contains:
20 pcs. (MLD-28, DLD-28) 15 pcs. (MLD-34, DLD-34)



Mounting methods



Easy mounting with special base for ZLD types



Legends



SW28/R (SLD, MLD & ZLD-28) SW28/D
SW34/R (SLD, MLD & ZLD-34) SW34/D
SW44/R (SLD, MLD & ZLD-44) W44/D





A-1018/PL Recess mounting base
A-1020/PL Recess mounting base



Accessories contained in the package. Suitable for wall or ceiling mounting.



Dimensions in mm

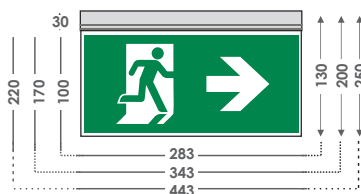



EDGE ILLUMINATION MAINTAINED SIGNS 220-240V AC WITH LEDs

TYPE	PICTURE	CODE	BATTERY	DURATION	CONSUMPTION	LIGHT OUTPUT	GROSS WEIGHT
MLD-28D/w	B	922502811	3,6V/1Ah Ni-Cd	3 h	3W/7,5VA	85/85 lm	710 gr.
MLD-34D/w	B	922503426	3,6V/1Ah Ni-Cd	3 h	3W/8VA	105/85 lm	1070 gr.
MLD-44D/w	B	922504417	3,6V/1Ah Ni-Cd	3 h	3W/8VA	105/85 lm	1680 gr.

SIGN FOR GENERAL USE 220-240V AC WITH LEDs

TYPE	PICTURE	CODE	BATTERY	DURATION	CONSUMPTION	LIGHT OUTPUT	GROSS WEIGHT
MLD-28S/g	C	922502800	3,6V/1Ah Ni-Cd	3 h	3W/7,5VA	18/18 lm	670 gr.
MLD-34S/g	C	922503400	3,6V/1Ah Ni-Cd	3 h	3W/8VA	22/18 lm	1000 gr.
MLD-44S/g	C	922504400	3,6V/1Ah Ni-Cd	3 h	3W/8VA	22/18 lm	1500 gr.

EDGE ILLUMINATION SELF-TESTING MAINTAINED SIGNS 220-240V AC ME LEDs WITH LEDs

TYPE	PICTURE	CODE	BATTERY	DURATION	CONSUMPTION	LIGHT OUTPUT	GROSS WEIGHT
ZLD-28/EM	A	922502858	3,6V/1,5Ah Ni-Mh	3 h	3,8W/6,5VA	125/125 lm	1075 gr.
ZLD-34/EM	A	922503462	3,6V/1,5Ah Ni-Mh	3 h	4W/6,7VA	145/125 lm	1475 gr.
ZLD-44/EM	A	922504456	3,6V/1,5Ah Ni-Mh	3 h	4,3W/6,9VA	170/125 lm	2045 gr.

CENTRAL BATTERY SYSTEM EDGE ILLUMINATION SIGNS 110-240V DC-AC/50-60Hz WITH LEDs

TYPE	PICTURE	CODE	BATTERY	DURATION	CONSUMPTION	LIGHT OUTPUT	GROSS WEIGHT
ZLD-28/CBS/EM	A	922502863	-	-	1,9W/2,1VA	125 lm	985 gr.
ZLD-34/CBS/EM	A	922503468	-	-	2,2W/2,42VA	145 lm	1380 gr.
ZLD-44/CBS/EM	A	922504459	-	-	2,6W/2,86VA	170 lm	1910 gr.
DLD-28/CBS/w	B	922202870	-	-	1,5W/4,5VA	85 lm	650 gr.
DLD-34/CBS/w	B	922603401	-	-	1,5W/4,5VA	105 lm	1000 gr.
DLD-44/CBS/w	B	922604410	-	-	1,5W/4,5VA	105 lm	1620gr.

CENTRAL BATTERY SYSTEM EDGE ILLUMINATION SIGNS 24V AC/DC WITH LEDs

TYPE	PICTURE	CODE	BATTERY	DURATION	CONSUMPTION	LIGHT OUTPUT	GROSS WEIGHT
DLD-28/CBS/w/24V	B	922202808	-	-	1,2W/2,2VA	85 lm	610 gr.
DLD-34/CBS/w/24V	B	922203412	-	-	1,5W/2,8VA	105 lm	960 gr.
DLD-44/CBS/w/24V	B	922204405	-	-	-	-	-
ZLD-28/CBS/24V/EM	A	922502864	-	-	1,4W/1,55VA	125 lm	945 gr.
ZLD-34/CBS/24V/EM	A	922503469	-	-	1,6W/1,75VA	145 lm	1340 gr.
ZLD-44/CBS/24V/EM	A	922504460	-	-	1,85W/2,05VA	170 lm	1870 gr.



In June of 2012, CEN adopted the international standard ISO 7010 regarding graphical symbols and safety signs. Since all safety signs are to be designed based on this standard, we will be able to recognize a safety exit in any European country.

In our catalog you can find a wide variety of luminaires with safety signage based on the EN ISO 7010 standard.

The signage used on products MLD-28S/g, MLD-34S/g and MLD-44S/g does not comply with the latest European legislation and so can only be used as General Purpose Luminaires and not Emergency Escape Luminaires



All MLD, SLD and MLD types (except CBS) can be converted in non-maintained luminaires after pressing the TEST button



For accessories turn to page 140-141