




PRODUCT DETAILS



UPCOMING NEW FAST RUNNER UPDATED PHASE-OUT PRODUCTS

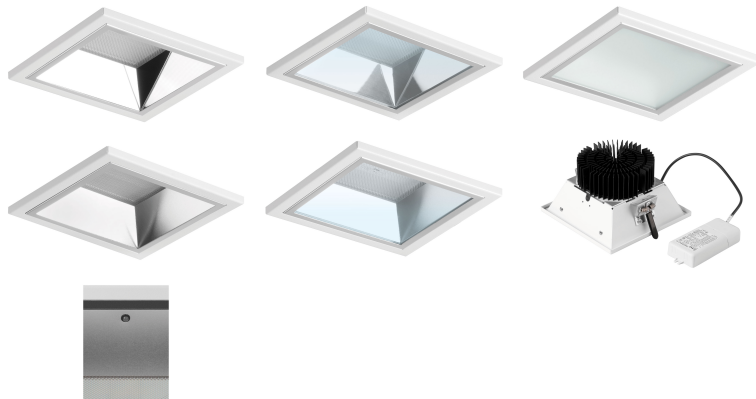

DOWNLOADS

[Certificates](#)

[Datasheet](#)

[Installation manual](#)

NOVIEL S

Description Product map

MOUNTING	Ceiling recessed
LIGHT SOURCE	LED
OPTICAL SYSTEM	Polished / matt reflector (PRE/MRE) Polished reflector + transparent cover (PRT) Matt reflector + transparent cover (MRT) Polished reflector + opal cover (PRO)
LIGHT DISTRIBUTION	Direct
WIRING	Electronic control gear FIX / DALI (ECG / EDA) Emergency unit variant (3H)
MATERIALS	Cover: transparent / opal PMMA Diffuser: microprismatic PMMA Housing: sheet steel Reflector: polished / matt anodized aluminium Trim: sheet steel
SURFACE FINISH	Trim: white RAL 9003 (W03)
SERVICE LIFETIME (Ta=25°C)	50,000 hours / L80
AMBIENT OPERATING TEMPERATURE	From -20 °C to +35 °C (from 0 °C with EM unit)

AREAS OF APPLICATION

- EDUCATION
- HOSPITALITY
- HOUSE AND FLAT
- HEALTH AND CARE
- RETAIL AND PRESENTATION
- OFFICE



List of products

PRODUCT NAME	STATUS	QUICK DOWNLOADS
NOVIEL S POLISHED REF IP40 LED 1400lm/840 1x15W, LED DRIVER, RAL 9003	Updated	RFA / 3DS / IES / LDT / CURVE /
NOVIEL S POLISHED REF IP40 LED 1900lm/830 1x20W, LED DRIVER, RAL 9003	Updated	RFA / 3DS / IES / LDT / CURVE /
NOVIEL S POLISHED REF IP40 LED 2000lm/840 1x20W, LED DRIVER, RAL 9003	Updated	RFA / 3DS / IES / LDT / CURVE /
NOVIEL S POLISHED REF IP40 LED 1350lm/830 1x15W, LED DRIVER, RAL 9003	Updated	RFA / 3DS / IES / LDT / CURVE /
NOVIEL S MATT REF IP40 LED 1450lm/840 1x15W, LED DRIVER, RAL 9003	Updated	RFA / 3DS / IES / LDT / CURVE /
NOVIEL S MATT REF IP40 LED 1950lm/830 1x20W, LED DRIVER, RAL 9003	Updated	RFA / 3DS / IES / LDT / CURVE /
NOVIEL S MATT REF IP40 LED 2050lm/840 1x20W, LED DRIVER, RAL 9003	Updated	RFA / 3DS / IES / LDT / CURVE /
NOVIEL S MATT REF IP40 LED 1400lm/830 1x15W, LED DRIVER, RAL 9003	Updated	RFA / 3DS / IES / LDT / CURVE /
NOVIEL S POLISHED+TRANSPARENT IP44 LED 1300lm/830 1x15W, LED DRIVER, RAL 9003	Updated	RFA / 3DS / IES / LDT / CURVE /
NOVIEL S POLISHED+TRANSPARENT IP44 LED 1950lm/840 1x20W, LED DRIVER, RAL 9003	Updated	RFA / 3DS / IES / LDT / CURVE /
NOVIEL S POLISHED+TRANSPARENT IP44 LED 1850lm/830 1x20W, LED DRIVER, RAL 9003	Updated	RFA / 3DS / IES / LDT / CURVE /
NOVIEL S POLISHED+TRANSPARENT IP44 LED 1350lm/840 1x15W, LED DRIVER, RAL 9003	Updated	RFA / 3DS / IES / LDT / CURVE /
NOVIEL S POLISHED+OPAL IP44 LED 1300lm/830 1x15W, LED DRIVER, RAL 9003	Updated	RFA / 3DS / IES / LDT / CURVE /
NOVIEL S POLISHED+OPAL IP44 LED 1950lm/840 1x20W, LED DRIVER, RAL 9003	Updated	RFA / 3DS / IES / LDT / CURVE /
NOVIEL S POLISHED+OPAL IP44 LED 1850lm/830 1x20W, LED DRIVER, RAL 9003	Updated	RFA / 3DS / IES / LDT / CURVE /
NOVIEL S POLISHED+OPAL IP44 LED 1350lm/840 1x15W, LED DRIVER, RAL 9003	Updated	RFA / 3DS / IES / LDT / CURVE /
NOVIEL S MATT+TRANSPARENT IP44 LED 1400lm/840 1x15W, LED DRIVER, RAL 9003	Updated	RFA / 3DS / IES / LDT / CURVE /
NOVIEL S MATT+TRANSPARENT IP44 LED 1900lm/830 1x20W, LED DRIVER, RAL 9003	Updated	RFA / 3DS / IES / LDT / CURVE /
NOVIEL S MATT+TRANSPARENT IP44 LED 2000lm/840 1x20W, LED DRIVER, RAL 9003	Updated	RFA / 3DS / IES / LDT / CURVE /
NOVIEL S MATT+TRANSPARENT IP44 LED 1350lm/830 1x15W, LED DRIVER, RAL 9003	Updated	RFA / 3DS / IES / LDT / CURVE /

The manufacturer reserves all rights to make changes in materials and components used in production of lighting fittings.