

recessed



ref. ringO PLUS



General



850°C 150 Ø210 300 LED


w	lum	mA	CRI
18	2.000	350	>85
16,6	2.000	700	>85
24,9	3.000	700	>85
31,1	4.000	700	>85

Power



230V

2000lm / 16,6W	RNGP	A	20
Led 3000lm / 24,9W	RNGP	A	30
4000lm / 31,1W	RNGP	A	40
*ringO PLUS FLAT 2000lm / 18W	RNGP	A	30

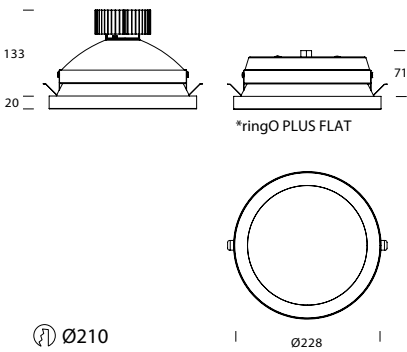

Led Control



N

No Dimmable

RNGP A .. N



F

Dimmable 1-10 V / Push

RNGP A .. F



D

Dimmable Dali

RNGP A .. D

Led Colour Temperature



3

3000° K

RNGP A .. 3



4

4000° K

RNGP A .. 4

Led Beam Angle



9

Expansive

RNGP A .. 9

Led Complements



A

Ice Diffuser

RNGP A A .



C

Prismatic Diffuser

RNGP A C .

Colours



WS

Satin White

RNGP A WS




BS

Satin Black

RNGP A BS

Photometric Data



recessed