





SANDVIK

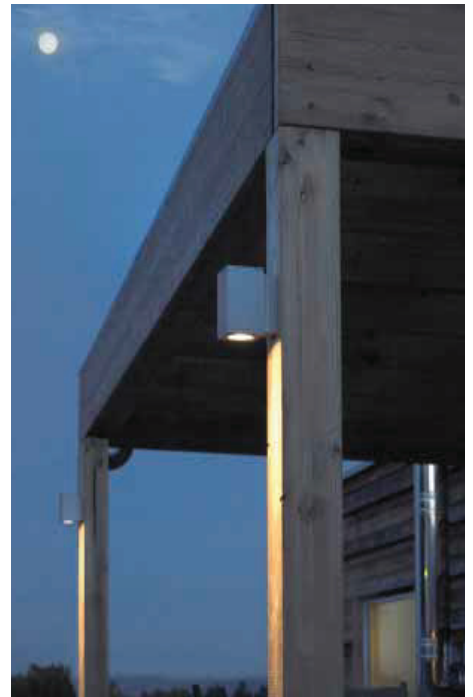

SANDVIK Aluminium powder coated up & down wall light. Tempered clear glass.

Art	Watt	Type of light source:	Luminous flux	Colour temperature	Lifetime (L70/B50)	EEL	Version	Dimmable
1730	2x max 4W	2x GU10	-	-	-	-	Up & Down	-
1731	2x3,9W	2x LED GU10	477 lm	2700K	40 000h	A+	Up & Down	Dim. Triac
1732	2x8W	LED	1126 lm	3000K	50 000h	A+	Up & Down	Dim. Triac

Art. 1731: 2x3,9W LED GU10 included, 2x265 lm, 2700K, 40000h, 25D, EEL: A+
 Art. 1732: Light distribution, 36D




Art. 1730
 Art. 1731
 Art. 1732

SANDVIK Aluminium powder coated down wall light. Tempered clear glass.

Art	Watt	Type of light source:	Luminous flux	Colour temperature	Lifetime (L70/B50)	EEL	Version	Dimmable
793	max 4W	GU10	-	-	-	-	Down light	-
794	3,9W	GU10	-	2700K	40 000h	A+	Down light	Dim. Triac

Art. 794: 3,9W LED GU10 included, 265 lm, 2700K, 40000h, 25D,



Art. 793
 Art. 794