

GUELL 2



● GR-94 / Metallic grey / Textured

LED floodlight for indoor and outdoor lighting, comprising:


- Die-cast aluminum housing chemically pre-treated and painted with polyester powder coating
- Flat tempered glass diffuser
- Very high performance reflectors made of 99.99% plated aluminium, polished, oxidised and free of iridescence
- Anti-ageing silicone gasket
- Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- Stainless steel external screws
- Fully integrated stainless steel aluminium spring clips
- Powder coated steel bracket
- On request, versions with dimmable ballast available
- 3000 K and 5000 K available upon request




GUELL 2
S/W

GUELL 2
A/W

GUELL 2
C/I

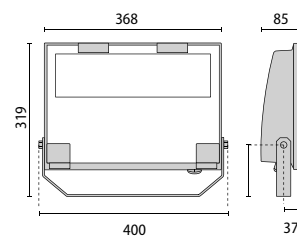

AC/DC Possibility of AC/DC versions in accordance with EN 5012 and VDE 0108 (contact the company).

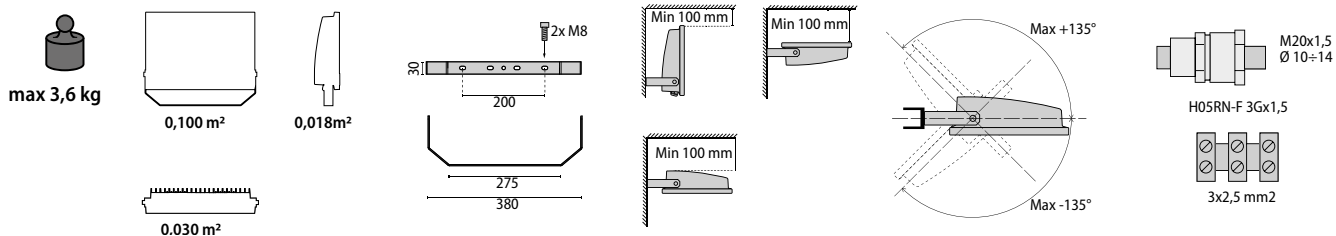

GUELL 2 S/W

IK07 3J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	133 W	I		80	4000	•	S/W	-	20380 lm	13804 lm	70	10	125000 h	●	3100132
LED	105 W	I		80	4000	•	S/W	-	14552 lm	11863 lm	70	10	130000 h	●	06094094
LED	78 W	I		80	4000	•	S/W	-	11116 lm	9520 lm	70	10	150000 h	●	06094294



GUELL 2 A/W

IK07 3J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	133 W	I		80	4000	•	A40/W	-	20380 lm	13446 lm	70	10	125000 h	●	3100129
LED	105 W	I		80	4000	•	A40/W	-	14552 lm	11551 lm	70	10	130000 h	●	06094494
LED	78 W	I		80	4000	•	A40/W	-	11116 lm	9289 lm	70	10	150000 h	●	06094694



GUELL 2 C/I


IK07 3J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	105 W	I		80	4000	•	C/I	-	14552 lm	10990 lm	70	10	150000 h	●	06287394
LED	78 W	I		80	4000	•	C/I	-	11116 lm	8854 lm	70	10	150000 h	●	06286794




OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
GUELL 2		
Protective grid GUELL 2		14173502
Connection box IP 66		14174220
Wall support 500 mm/19.69" GUELL 1/2	●	14173394
Wall support 1000 mm/39.37" GUELL 1/2	●	14173494
Single pole top support GUELL 2	●	14174094
Double pole top support GUELL 2	●	14174194
Reinforcing bracket GUELL 2 in painted steel. Used to fasten the floodlight with a single screw in the centre of the bracket.	●	14460594
GUELL 2 A/W - GUELL 2 S/W		
Soft glass GUELL 2	●	14173994
GUELL 2 A/W		
Cover GUELL 2 Asymmetrical	●	14173694
Louvre GUELL 2 Asymmetrical		14173820
GUELL 2 S/W		
Louvre GUELL 2 Symmetrical		14173720
GUELL 2 C/I		
GUELL 2/C GR-94 frosted glass.	●	14476794




14173502

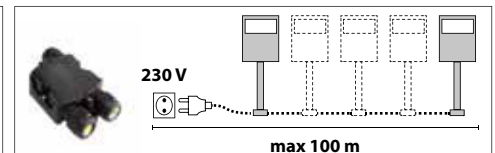

14174220



14173394




14173494



14174094




14174194



14460594




14173994




17173694



14173820



14173720



14476794


GUELL 2.5



● GR-94 / Metallic grey / Textured

LED floodlight for indoor and outdoor lighting, comprising:

- Die-cast aluminum housing chemically pre-treated and painted with polyester powder coating
- Flat tempered glass diffuser
- Very high performance reflectors made of 99.99% plated aluminium, polished, oxidised and free of iridescence
- Anti-ageing silicone gasket
- Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- The versions with A50/W optics comprise LED modules and reflectors specifically studied for settings that require highly asymmetrical light distribution.
- Stainless steel external screws
- Fully integrated stainless steel aluminium spring clips
- Powder coated steel bracket
- 3000 K and 5000 K available upon request

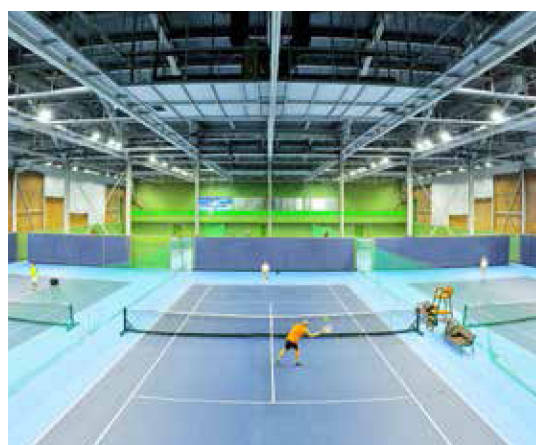

GUELL 2.5
S/W




GUELL 2.5
A/W



GUELL 2.5
A50/W



GUELL 2.5
C/I

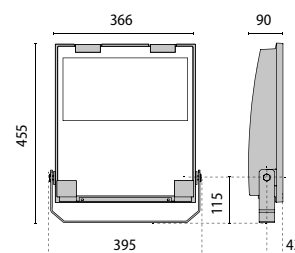

AC/DC

Possibility of AC/DC versions in accordance with EN 5012 and VDE 0108 (contact the company).

GUELL 2.5 S/W

IK07 3J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	158 W	I		80	4000	•	S/W	-	21619 lm	18062 lm	70	10	130000 h	●	306125

Power LED dimmable 1-10 V 220-240 V 50/60 Hz

LED	238 W	I		80	4000	•	S/W	-	33426 lm	29534 lm	70	10	130000 h	●	306201
LED	166 W	I		80	4000	•	S/W	-	22284 lm	20195 lm	70	10	130000 h	●	306199



GUELL 2.5 A/W

IK07 3J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	158 W	I		80	4000	•	A40/W	-	21619 lm	17511 lm	70	10	130000 h	●	306126

Power LED dimmable 1-10 V 220-240 V 50/60 Hz

LED	238 W	I		80	4000	•	A40/W	-	33426 lm	28464 lm	70	10	130000 h	●	306202
LED	166 W	I		80	4000	•	A40/W	-	22284 lm	19364 lm	70	10	130000 h	●	306200



GUELL 2.5 A50/W

IK07 3J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	156 W	I		80	4000	•	A50/W	-	24170 lm	18453 lm	70	10	130000 h	●	306204
LED	118 W	I		80	4000	•	A50/W	-	18127 lm	13862 lm	70	10	130000 h	●	306203

Power LED - dimmable DALI 220-240 V 50/60 Hz

LED	156 W	I		80	4000	•	A50/W	-	24170 lm	18453 lm	70	10	130000 h	●	306206
LED	118 W	I		80	4000	•	A50/W	-	18127 lm	13862 lm	70	10	130000 h	●	306205



GUELL 2.5 C/I

IK07 3J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	158 W	I		80	4000	•	C/I	-	21619 lm	17576 lm	70	10	130000 h	●	306207

Power LED dimmable 1-10 V 220-240 V 50/60 Hz

LED	238 W	I		80	4000	•	C/I	-	33426 lm	27961 lm	70	10	130000 h	●	306210
LED	166 W	I		80	4000	•	C/I	-	22284 lm	18999 lm	70	10	130000 h	●	306209



OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
GUELL 2.5 S/W (166 W - 238 W)		
Louvre GUELL 2.5 Symmetrical		310961
GUELL 2.5 A/W (166 W - 238 W)		
Louvre GUELL 2.5 Symmetrical		310962
GUELL 2.5 A/W - S/W (166 W - 238 W)		
GUELL 2.5 frosted glass	●	310964
GUELL 2.5		
Cover GUELL 2.5	●	310963
Protective grid GUELL 2.5		310965
Wall mount support 1000 mm/39,37"	●	310982
Double pole top support GUELL 2.5	●	310967
Single pole top support GUELL 2.5	●	310966



310961 310962 310963 310964 310965



310982 310967 310966

