



101805-06-07-08

BEAMER RGBW / TUNABLE WHITE

Projector for outdoor installation. phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws. With 18 to 60 OSRAM RGBW LED, available as 24V (remote power supply needed) or 220-240V (built-in power supply), DMX interface. IP66 rating.



Technical features




Technical data

IP Rating	IP66
IK Rating	08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	OSRAM OSOLON SSL 80 LED
Screws	Stainless steel
Transformer	Built-in or remote, as per customer preference
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. power cable included



101805		BEAMER-18 RGBW
light source	light beam options	lumen output (lm)
3000°K warm-white		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	2.206
4000°K neutral-white		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	2.758

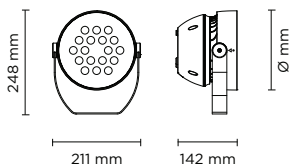

Technical data


Wattage 36 WATT

Light source NR. 18 OSRAM LED

Gross weight 2,60 Kg



101806		BEAMER-30 RGBW
light source	light beam options	lumen output (lm)
3000°K warm-white		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	3.989
4000°K neutral-white		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	4.986

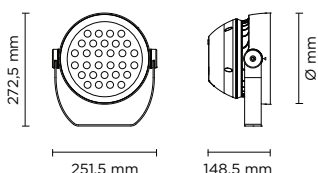

Technical data


Wattage 60 WATT

Light source NR. 30 OSRAM LED

Gross weight 5,20 Kg



101807		BEAMER-48 RGBW
light source	light beam options	lumen output (lm)
3000°K warm-white		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	5.124
4000°K neutral-white		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	6.405

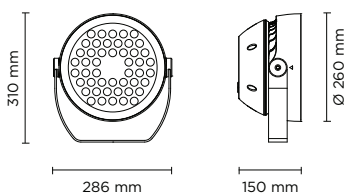

Technical data


Wattage 100 WATT

Light source NR. 48 OSRAM LED

Gross weight 7,30 Kg



101808		BEAMER-60 RGBW
light source	light beam options	lumen output (lm)
3000°K warm-white		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	9.906
4000°K neutral-white		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	12.383

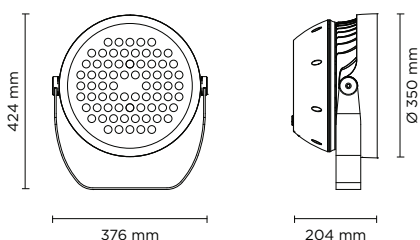

Technical data

Wattage 150 WATT

Light source NR. 60 OSRAM LED

Gross weight 13,50 Kg

